

304/304L

STAINLESS STEEL



Architectural Moldings

Kitchen Equipment

**Industrial Processing
Equipment**



High strength, excellent corrosion resistance and excellent formability make Types 304 and 304L useful for many applications. Typical uses include architectural moldings and trim, kitchen equipment, as well as chemical, textile, paper, and pharmaceutical industry processing equipment.

For severely corrosive environments or when welding is required, Type 304L is preferred because of its greater immunity to intergranular corrosion.

304/304L STAINLESS STEEL

Product Description

Type 304 is a variation of the base AK Steel 18-8, with a higher chromium and lower carbon content. The lower carbon content minimizes chromium carbide precipitation due to welding and its susceptibility to intergranular corrosion. In some instances Type 304 can be used in the "as-welded" condition.

Type 304L is an extra low-carbon variation of Type 304 with a 0.03% maximum carbon content that eliminates carbide precipitation due to welding. As a result, this alloy can be used in the "as welded" condition, even in severe corrosive conditions. In many cases it eliminates the necessity of annealing weldments except for applications specifying stress relief. Type 304L has slightly lower mechanical properties than Type 304.

Composition		Type 304 (wt %)	Type 304L (wt %)
Carbon	(C)	0.08 max.	0.03 max.
Manganese	(Mn)	2.00 max.	2.00 max.
Phosphorus	(P)	0.045 max.	0.045 max.
Sulfur	(S)	0.030 max.	0.030 max.
Silicon	(Si)	0.75 max.	0.75 max.
Chromium	(Cr)	18.0 – 20.00	18.0 – 20.00
Nickel	(Ni)	8.00 – 12.00	8.00 – 12.00
Nitrogen	(N)	0.10 max.	0.10 max.
Iron	(Fe)	Balance	Balance

AVAILABLE FORMS

AK Steel produces Type 304 and 304L in thicknesses from 0.01 – 0.25 in. (0.25 – 6.35 mm) max. and widths up to 60 in. (1524 mm). For other thicknesses and widths, contact your AK Steel sales representative.

METRIC PRACTICE

Values shown in this bulletin were established in U.S. customary units. The metric equivalents may be approximate.

304/304L STAINLESS STEEL

Mechanical Properties

TABLE 1 – TYPICAL ROOM TEMPERATURE MECHANICAL PROPERTIES

	UTS, ksi. (MPa)	0.2% YS, ksi. (MPa)	Elongation % in 2" (50.8 mm)	Rockwell Hardness, B
Type 304	95 (655)	42 (290)	55	84
Type 304L	95 (655)	40 (276)	55	82

TABLE 2 – ELEVATED TEMPERATURE MECHANICAL PROPERTIES

Temperature, °F (°C)	UTS, ksi. (MPa)	0.2% YS, ksi. (MPa)	Elongation % in 2" (50.8 mm)
Room	85 (586)	35 (241)	55
400 (204)	72 (496)	23 (159)	51
600 (316)	68 (469)	20 (134)	45
800 (427)	64 (441)	17 (114)	40
1000 (538)	56 (386)	14 (97)	36
1200 (649)	44 (303)	13 (88)	34
1400 (760)	29 (200)	11 (76)	36
1600 (871)	16 (110)	–	40


TABLE 3 – LOW TEMPERATURE MECHANICAL PROPERTIES

Condition	Temperature, °F (°C)	UTS, ksi. (MPa)	0.2% YS, ksi. (MPa)	Elongation % in 2" (50.8 mm)
Annealed	-320 (-196)	235 (1620)	56 (386)	40
	-80 (-62)	161 (1110)	50 (345)	57
	-40 (-40)	145 (1000)	48 (331)	60
	32 (0)	122 (841)	40 (296)	65
	70 (21)	85 (586)	35 (241)	55

TABLE 4 – FATIGUE STRENGTH

Condition	Fatigue Strength, ksi. (MPa)
Annealed – 150 BHN	35 (241)
Cold Drawn – 277 BHN	70 (70)

FIGURE 1 – EFFECT OF COLD WORK ON TENSILE PROPERTIES

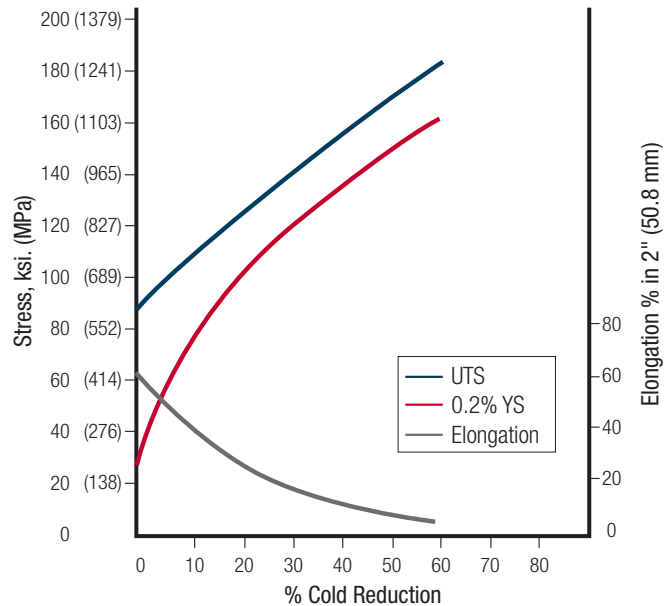

304/304L STAINLESS STEEL

Properties

PHYSICAL PROPERTIES

Density, lbs./in. ³ (g/cm ³)	0.29 (8.03)
Electrical Resistivity, $\mu\Omega\cdot\text{in.}$ ($\mu\Omega\cdot\text{cm}$)	
68 °F (20 °C)	28.4 (72)
1200 °F (659 °C)	45.8 (116)
Thermal Conductivity, BTU/hr./ft. ² ./°F W/(m·K)	
212 °F (100 °C)	9.4 (16.2)
932 °F (500 °C)	12.4 (21.4)
Coefficient of Thermal Expansion, in./in./°F ($\mu\text{m}/\text{m}\cdot\text{K}$)	
32 – 212 °F (0 – 100 °C)	9.4×10^{-6} (16.9)
32 – 600 °F (0 – 315 °C)	9.9×10^{-6} (17.3)
32 – 1000 °F (0 – 538 °C)	10.2×10^{-6} (18.4)
32 – 1200 °F (0 – 649 °C)	10.4×10^{-6} (18.7)
Modulus of Elasticity, ksi. (MPa)	
in tension	28.0×10^3 (193×10^3)
in torsion	11.2×10^3 (78×10^3)
Magnetic Permeability Annealed, (H/m at 200 Oersteds)	1.02 max.
Specific Heat, BTU/lbs./°F (kJ/kg/K)	
32 – 212 °F (0 – 100 °C)	0.12 (0.50)
Melting Range, °F (°C)	2550 – 2650 (1399 – 1454)

CORROSION RESISTANCE

Types 304 and 304L exhibit excellent resistance to corrosive environments such as the chemical, textile and petroleum industries. Type 304 and 304L are found suitable in the food and dairy industries as well as excelling in rural and industrial atmospheric exposure. By reducing the carbon content in Type 304L, welding operations will not cause carbide precipitation that can lead to intergranular corrosion.

OXIDATION RESISTANCE

The maximum temperature to which Type 304 can be exposed continuously without appreciable scaling is about 1650 °F (899 °C). For intermittent cyclic exposure, is about 1500 °F (816 °C).

HEAT TREATMENT

Type 304 is non-hardenable by heat treatment.

Annealing: Heat to 1900 – 2050 °F (1038 – 1121 °C), then cool rapidly. Thin strip sections may be air cooled, but heavy sections should be water quenched to minimize exposure in the carbide precipitation region.

Stress Relief Annealing: Cold worked parts should be stress relieved at 750 °F (399 °C) for 1/2 to 2 hours.

COLD WORKING

High hardness and strength are achieved through cold working. In the annealed condition, Types 304 and 304L are very ductile and can be cold worked easily by roll forming, deep drawing, bending, and other common fabricating methods. Since the material work hardens rapidly, in-process annealing may be necessary to restore ductility and to lower hardness.

FORMABILITY

Types 304 and 304L can be readily formed and drawn. The higher nickel versions of Type 304 are well suited to severe forming applications involving multi-draw operations and forming of complex shapes. This is largely due to its combination of lower strength and lower work hardening rate. As with all austenitic stainless steels, annealing or stress-relieving can be performed following fabrication.

WELDABILITY

The austenitic class of stainless steels is generally considered to be weldable by the common fusion and resistance techniques. Special consideration is required to avoid weld “hot cracking” by assuring formation of ferrite in the weld deposit. Types 304 and 304L are generally considered to be the most common alloys of this stainless class. When a weld filler is needed, AWS E/ER 308, 308L or 347 are most often specified. Types 304 and 304L are well known in reference literature and more information can be obtained in the following ways:

1. ANSI/AWS A5.9, A5.22 and A5.4 (Stainless Steel Welding Electrode Specifications).
2. “Welding of Stainless Steels and Other Joining Methods,” SSINA, (www.ssina.com).
3. ANSI/AWS B2.1.009:2002 (GTAW 300's @ 0.50 – 0.14 in.).
4. ANSI/AWS B2.1-8-024:2001 (GTAW 300's @ 0.125 – 1.5 in.).
5. ANSI/AWS B2.1-8-013:2002 (SMAW 300's @ 0.050 – 0.14 in.).
6. ANSI/AWS B2.1-8-023:94 (SMAW 300's @ 0.125 – 1.5 in.).
7. ANSI/AWS B2.1.005:2002 (GMAW 300's @ 0.050 – 0.14 in.).
8. “High Frequency Welding of Stainless Steel Tubes” by H.N. Udall and R.K. Nichols.
9. ANSI/AWS D1.6/D1.6M:2007 (Structural Welding Code – Stainless Steel).

SPECIFICATIONS

Type 304 and 304L are covered by the following specifications:

Type 304	Type 304L
AMS 5513	AMS 5511
ASTM A240	ASTM A240
ASTM A666	ASTM A666



MAKING INNOVATION HAPPEN



SAFETY | QUALITY | PRODUCTIVITY | INNOVATION



AK Steel Corporation
9227 Centre Pointe Drive
West Chester, OH 45069
844.STEEL99 | 844.783.3599

www.aksteel.com
sales@aksteel.com

AK Steel is a leading producer of flat-rolled carbon, stainless and electrical steel products, primarily for the automotive, infrastructure and manufacturing, electrical power generation and distribution markets. Through its subsidiaries, the company also provides customer solutions through carbon and stainless steel tubing products, die design and tooling, and hot and cold stamping. Headquartered in West Chester, Ohio (Greater Cincinnati), the company employs approximately 9,200 men and women at manufacturing operations across seven states (Alabama, Indiana, Kentucky, Michigan, Ohio, Pennsylvania and West Virginia), as well as Canada and Mexico. Additional information about AK Steel is available at www.aksteel.com.

The information and data in this document are accurate to the best of our knowledge and belief, but are intended for general information only. Applications suggested for the materials are described only to help readers make their own evaluations and decisions, and are neither guarantees nor to be construed as express or implied warranties of suitability for these or other applications.

Data referring to material properties are the result of tests performed on specimens obtained from specific locations of the products in accordance with prescribed sampling procedures; any warranty thereof is limited to the values obtained at such locations and by such procedures. There is no warranty with respect to values of the materials at other locations.